

GFH (Green Fume Hood): CHEMICAL FILTRATION FUME HOOD

34" Countertop Depth

LENGTH:


- 48" 60" 72" 96"

SIDE PANELS:

- Glass Left Right
 Polyresin Left Right
 Powder Left Right
 Coated Steel

REAR PANEL:

- Glass
 Polyresin
 Powder Coated Steel

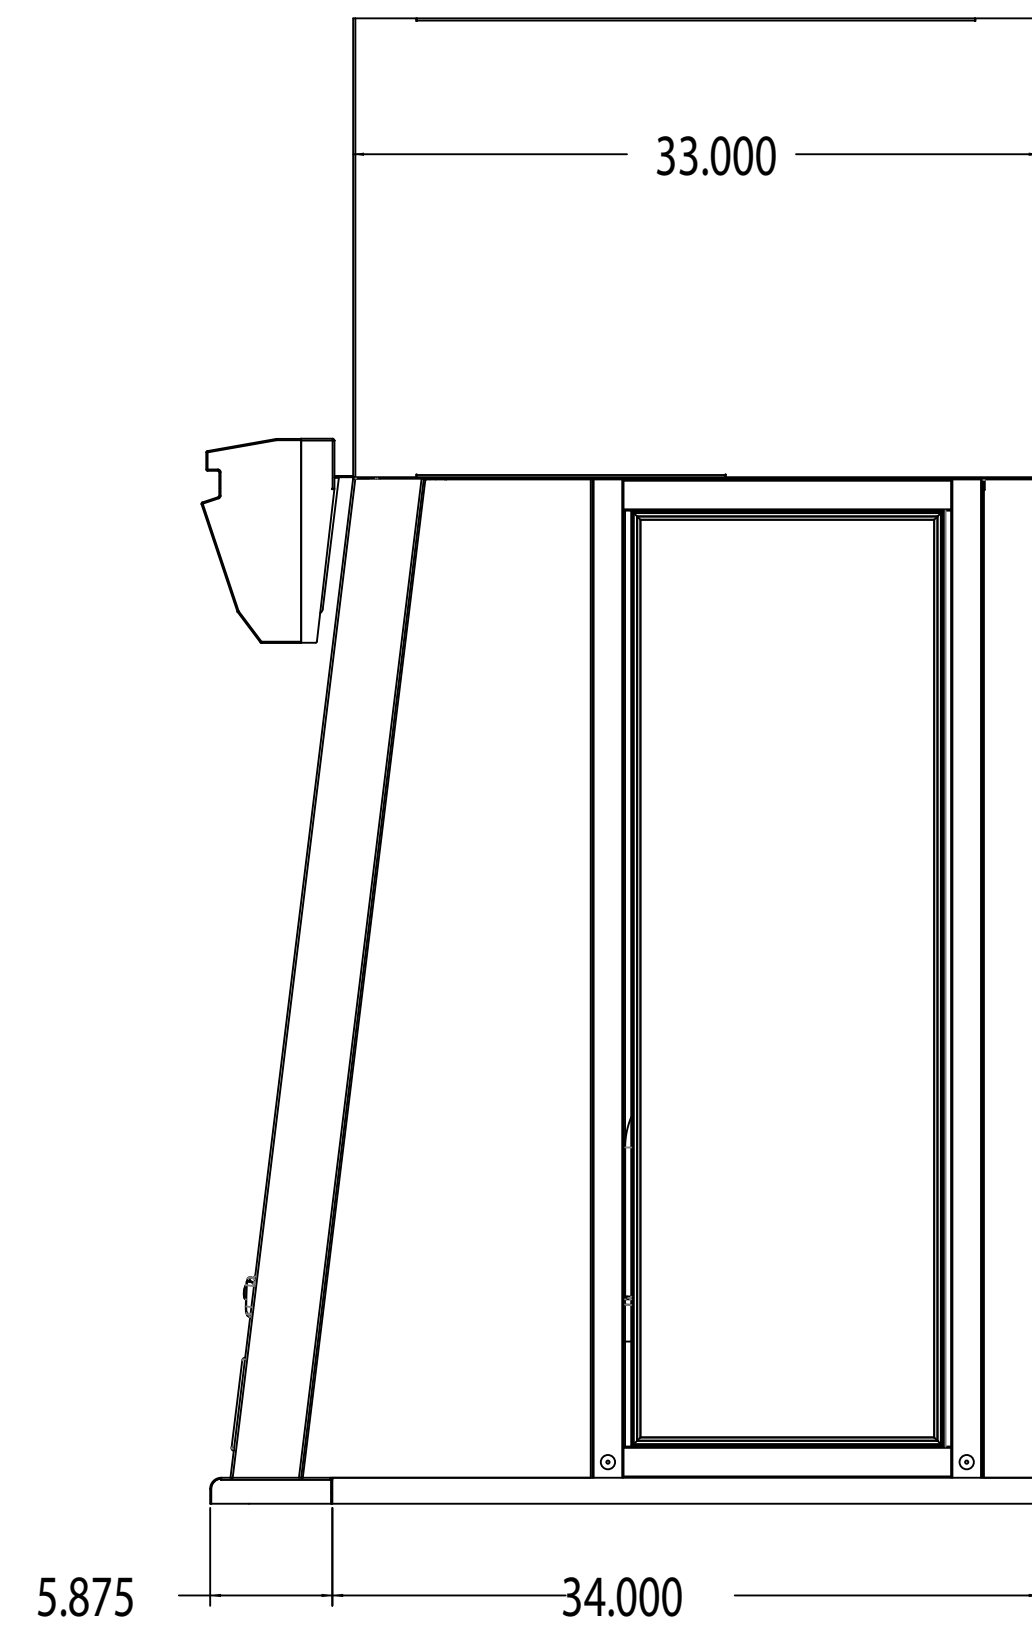


PRE-PIPING:

- Pre-Piping Up
 Pre-Piping Down

WORK SURFACE MATERIAL:

- Epoxy (standard)
 Type 304 Stainless Steel
 Type 316 Stainless Steel

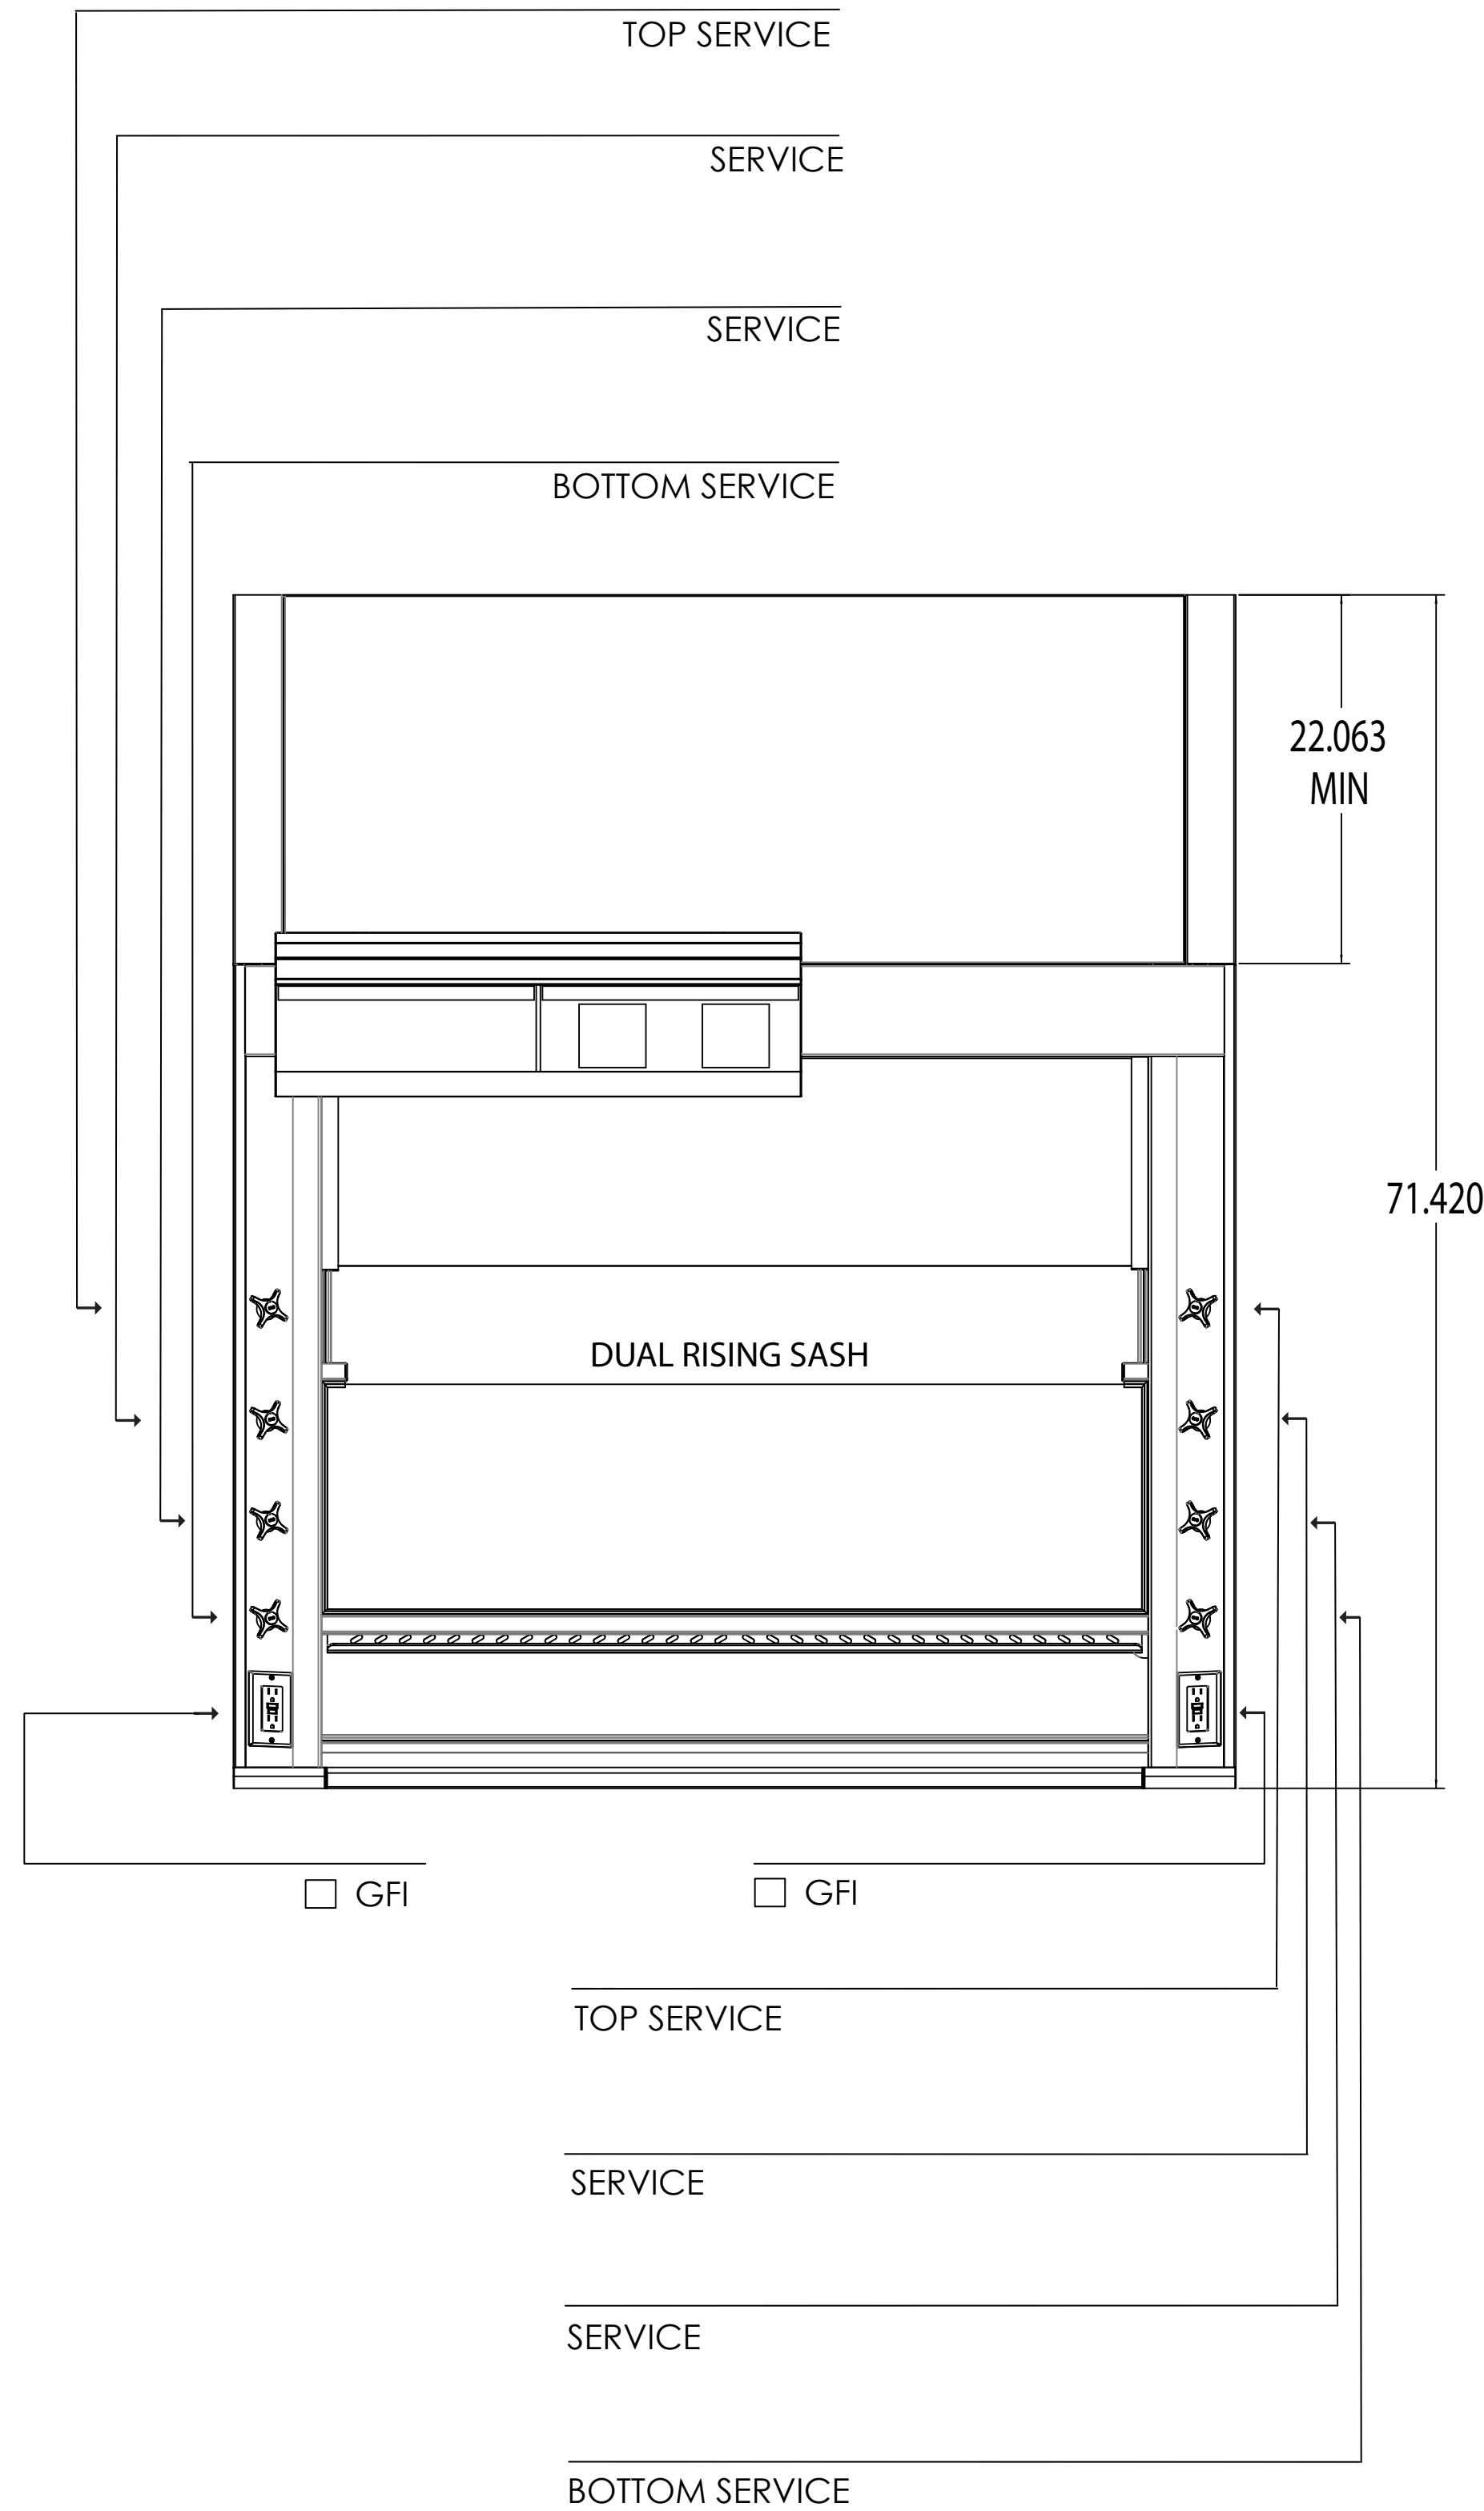

GFH STANDARD FEATURES

- Sash Frames & Glass:**
- 1. Painted Steel Frame w/ Laminated Safety Glass (standard)
 - 2. Secondary Sash w/ Laminated Safety Glass
- Airfoil:**
- Painted Steel (standard)
- Ceiling Enclosure (optional)**
- Minimum 22.063"
- Sash Type:**
- Vertical Sloped Double Sash (standard)
- Pre-Piping / Pre-Wiring:**
- All hoods are pre-wired & pre-piped unless other wise noted
- GFH Neutrodine® Technology controls with personalized RFID cards:**
- Three Distinct Levels of Access: User, Administrator, & Maintenance
 - Electric RFID filter identification
 - Temperature detection and alert system

OPTIONAL ACCESSORIES

- Sash Frame & Glass (Lower Sash Only):**
- Stainless Steel Frame w/ Laminated Safety Glass
- Airfoil:**
- Type 304 Stainless Steel
 - Type 316 Stainless Steel
- Trough:**
- None
 - Painted Steel
 - Type 304 Stainless Steel
 - Type 316 Stainless Steel
- Ceiling Enclosure Custom Height:**
- _____
- Service Fixture Type:**
- Front Mount Ball Valve w/ lever handles (ADA)
 - Front Mount w/ four-arm handle

SPECIAL REQUIREMENTS: _____



AIR MASTER SYSTEMS CORP
 6480 Norton Center Dr
 Muskegon, MI 4944
 (231) 798-1111 Fax: (231) 798-4000