

Gemini System

60.0", 72.0", 84.0", and 96" width units

SPECIFICATION WORKSHEET - SINGLE OR DOUBLE-SIDED, TWIN-TUBE SUPPORT FRAME

RACEWAY ELECTRIC
Reference page 3 for selection sheet

DATA PORTS (Left Post)
RJ45 (shielded)


NONE

LOWER ELECTRIC (Left Post)
pre-wired as selected below

NONE

WIDTH OF UNIT
60.0"

TABLE DEPTH
30.0" Table Depth (Per Side)

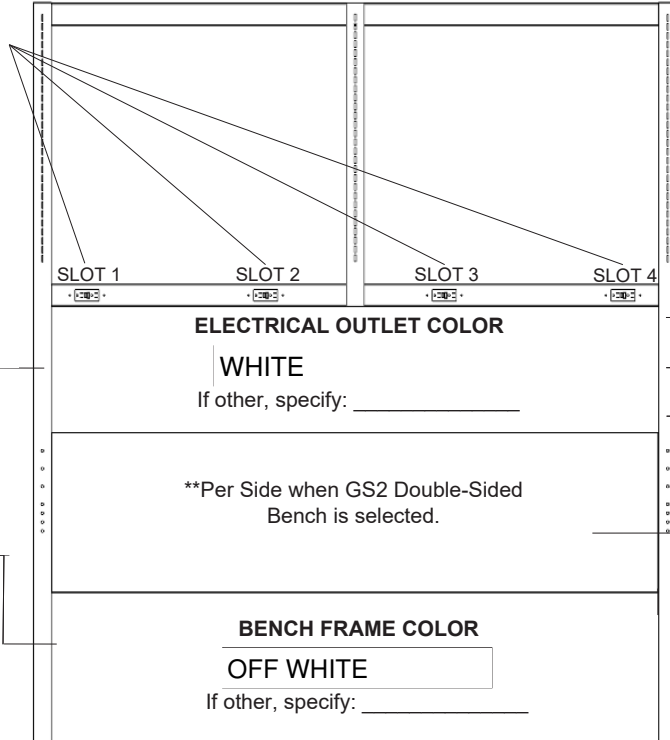

SLOT 1 SLOT 2 SLOT 3 SLOT 4

ELECTRICAL OUTLET COLOR
WHITE
If other, specify: _____

BENCH FRAME COLOR
OFF WHITE
If other, specify: _____

MODESTY PANEL
(non-adjustable) height at 36"
Yes ☐
No ☐

SERVICES (Right Post)
pre-plumbed to top of upright
see below for options

NONE indicate service required

NONE indicate service required

NONE indicate service required

SINGLE / DOUBLE SIDED
Single-Sided Bench

☐ Swap Sides, Plumbing on Left, Data on Right on GS1

POWER
ELECTRICAL WIRING OPTIONS

N/A


Specified length (top of bench to ceiling) _____

ELECTRICAL PIGTAIL EXIT LOCATION

N/A

GS1- Single-Sided: _____

N/A



DATA
DATA EXIT LOCATION

N/A

Specified length (top of bench to ceiling) _____

PLUMBING
SEE PLUMBING ILLUSTRATION ON SECOND PAGE FOR HOSE TYPES, CONNECTIONS, and FIXTURES. PLEASE SPECIFY IF BURNING GAS, OXYGEN, OR CLEAN GAS REQUIRED
-Your notes: _____

GS ____ - ____ - ____ P ____ D ____ E

example: GS2-4830-3P2D7E

Width Depth 3 Plumbing Services

Single-Sided = 1 / Double-Sided = 2 2 Data Ports 7 Electrical (Including lower)



GEMINI BENCH


example: **GSK-1535-12B**

Width Bracket Depth

Full Shelf Depth* Bracket Type

*This includes the 1" OR 3" extensions added to back edge.

Bracket Types:

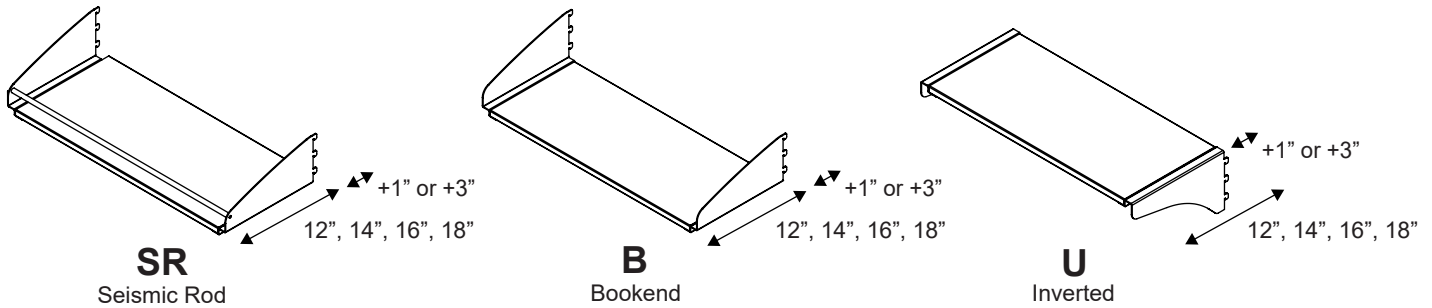

Gemini Width	Does it allow split shelving?	Part Numbers Needed
60"	Single & Double	GSK-__58-__ OR (2) GSK-__29-__
72"	Single & Double	GSK-__70-__ OR (2) GSK-__35-__
84"	Double Only	(2) GSK-__41-__
96"	Double Only	(2) GSK-__47-__

Bracket Selection:

N/A

Bracket ONLY:

☐ ONLY Brackets*
No shelves

*For purchases with alternative shelving.

Depth*: *Depth w/o extensions

N/A

Shelf Depth Extension:

None


Quantity:

None

Width:



N/A

Comments:

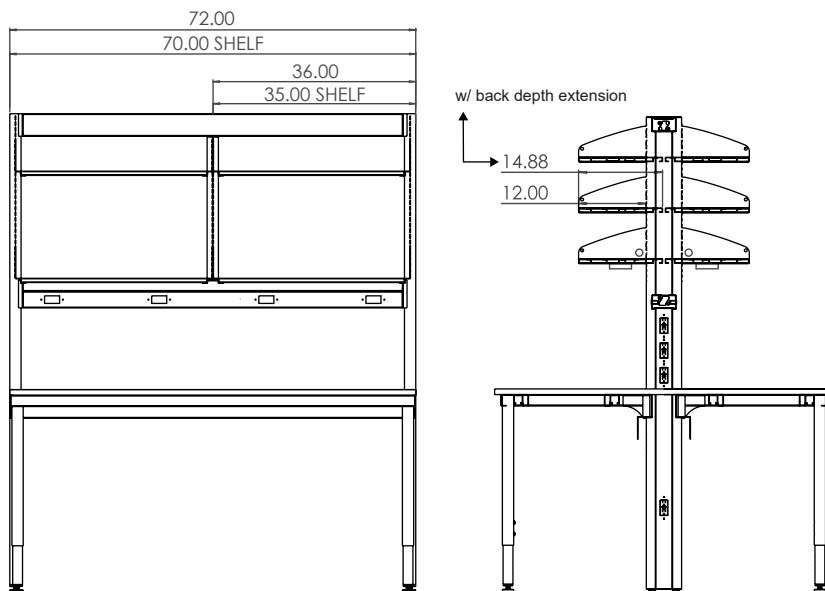

Specified length (top of bench to ceiling) _____

(Sold Separately)

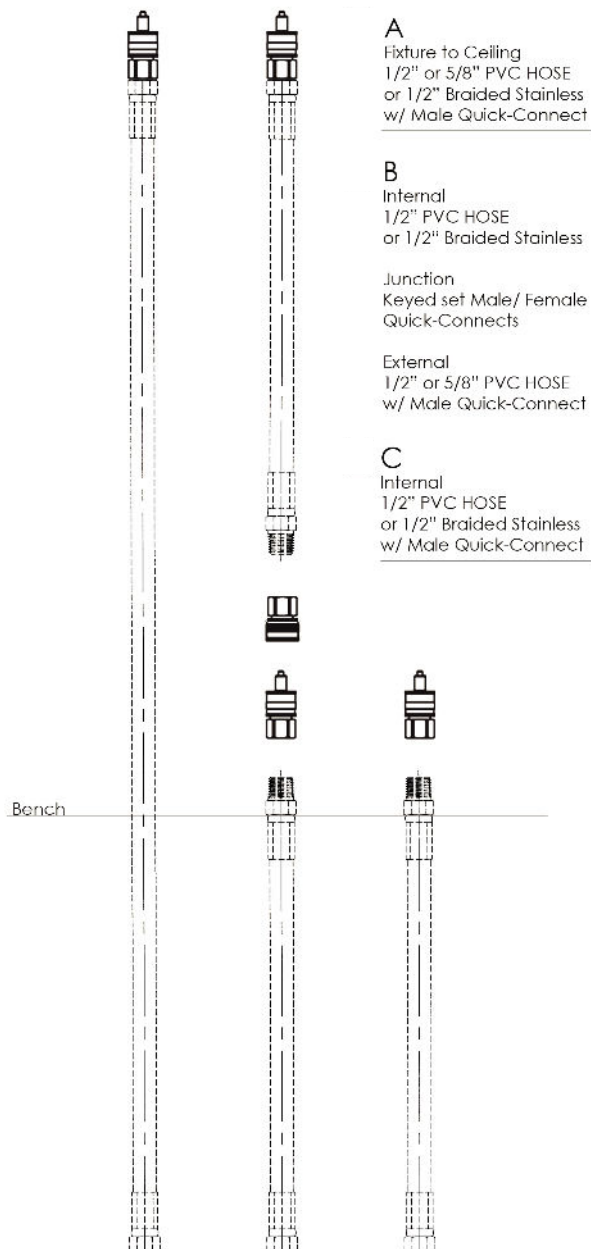


PVC HOSE ☐
STAINLESS HOSE ☐

A	B	C
☐	☐	☐
☐	☐	☐


(There is a maximum of three fixtures per side)

*4 Plumbing services maximum through Broen. Please contact AMS for Broen product information.

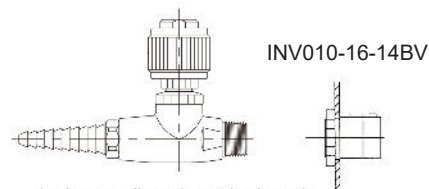


INV010-16-14BV

Single, Needle Valve - Black Knob
☐ FINISH: _____

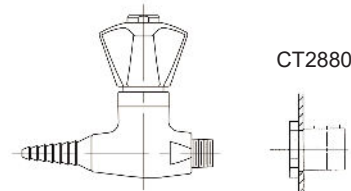


CT2880

Single, Needle Valve - ColorTech Knob
☐ FINISH: _____

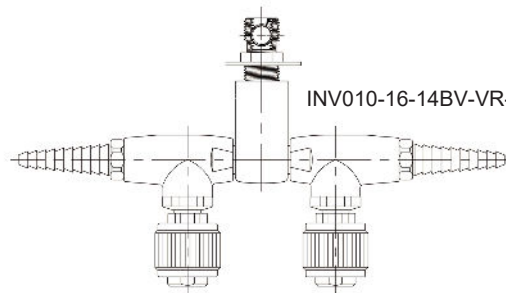


INV010-16-14BV-VR-WSA

Double, Needle Valve - Black Knobs
☐ FINISH: _____

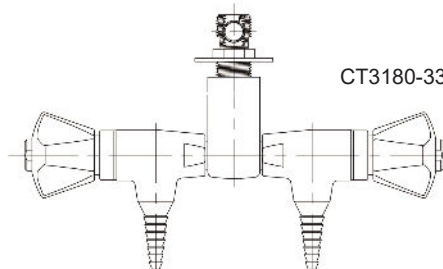

CT3180-332S

Double, Needle Valve - ColorTech Knobs
☐ FINISH: _____

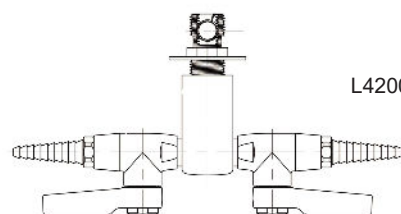

L4200

Double, Ball Valve - Lever Handles
☐ FINISH: _____

Gemini System

60.0", 72.0", 84.0", and 96" width units

SPECIFICATION WORKSHEET - RACEWAY ELECTRICAL



- Black
- Brown
- Gray
- Ivory
- Light Almond
- White

120VAC, 20Amp GFI Duplex



- Black
- Gray
- Ivory
- Light Almond
- White

USB Charging Outlet



- Black
- Brown
- Gray
- Ivory
- Red
- Light Almond
- White

20Amp GFI / USB x2 Combo



RJ45 Shielded Coupler

Gemini Systems **60.0"**, **72.0"**, and **84.0"** Width Units allow **up to 5** GFI slots on the top raceway.
Double-sided allow **up to 10** GFI slots on the top raceway.

60.0", 72.0" and 84.0" ONLY

From Left to Right facing front of bench ➤

SLOT 1	SLOT 2	SLOT 3	SLOT 4	SLOT 5
NONE	NONE	NONE	NONE	NONE

Slots 6 - 10 (Use only if Double-Sided)

SLOT 6	SLOT 7	SLOT 8	SLOT 9	SLOT 10
NONE	NONE	NONE	NONE	NONE

Gemini Systems **96.0"** Width Unit allow **up to 6** GFI slots on the top raceway.
Double-sided allow **up to 12** GFI slots on the top raceway.

96.0" ONLY

From Left to Right facing front of bench ➤

SLOT 1	SLOT 2	SLOT 3	SLOT 4	SLOT 5
NONE	NONE	NONE	NONE	NONE

SLOT 6
NONE

Slots 7 - 12 (Use only if Double-Sided)

SLOT 7	SLOT 8	SLOT 9	SLOT 10	SLOT 11
NONE	NONE	NONE	NONE	NONE

SLOT 12
NONE