The *Eliminator* 800 **SERIES**: Flat Front Hood

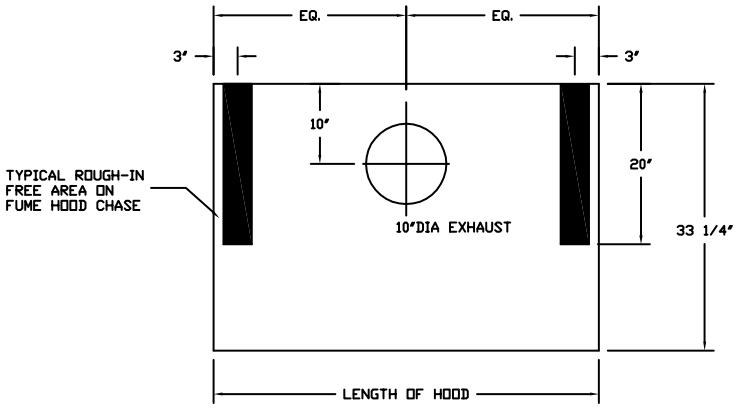

SERVICE ROUGH-IN DETAIL
(Specifically for 3', 4', 5', & 6' Hoods)

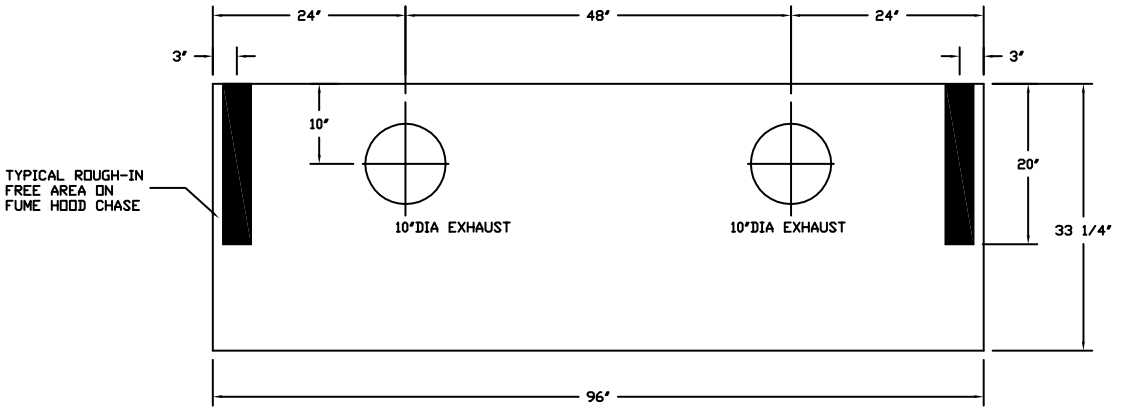

SERVICE ROUGH-IN DETAIL
(Specifically for 8' Hoods)

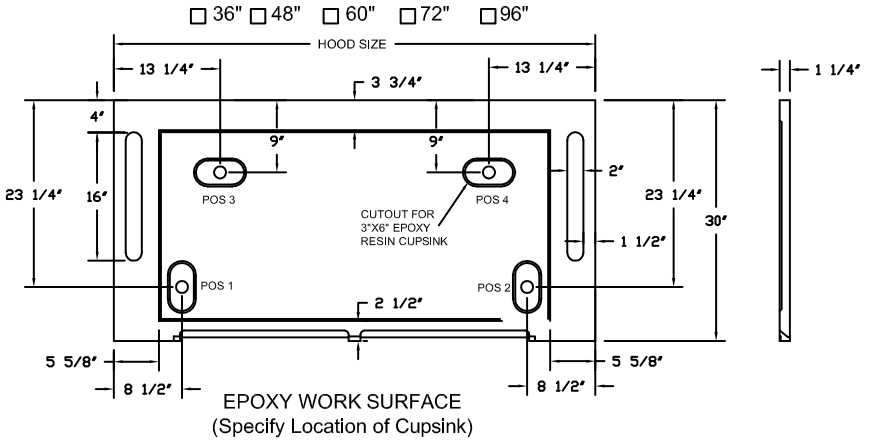

EPOXY WORK SURFACE
(Specify Location of Cupsink)

NOTE: IF ACID / FLAMMABLE CABINETS ARE REQUIRE - CUPSINKS LOCATIONS WILL VARY, PLEASE CONTACT AMS FOR DETAILS.

CUPSINK OPTION:

☐ 3" X 6" ☐ 3" X 9"
☐ OTHER _____
☐ NONE

Part No.	Superstructure			Worktop			Hood Opening		CFM @ 29" *	CFM @ 18" *	SP
	W	H	D	W	H	D	W	H			
EH-811-36	36"	56"	29-1/2"	36"	1-1/4"	30"	26"	29"	567	354	.25
EH-811-48	48"	56"	29 1/2"	48"	1-1/4"	30"	38"	29"	833	521	.33
EH-811-60	60"	56"	29 1/2"	60"	1-1/4"	30"	50"	29"	1100	688	.34
EH-811-72	72"	56"	29 1/2"	72"	1-1/4"	30"	62"	29"	1367	854	.34
EH-811-96	96"	56"	29 1/2"	96"	1-1/4"	30"	86"	29"	1900	1188	.40

*Height of open sash; CFM calculated at 100 FPM

AIR MASTER SYSTEMS CORP
6480 NORTON CENTER DR.
MUSKEGON, MI. 49441
TEL. (231) 798-1111 FAX (231) 798-4000
www.airmastersystems.com

CUSTOMER

Qty: _____

Color: _____